GROUND WATER PROSPECTS MAP

(PREPARED FROM SATELLITE IMAGE INTERPRETATION WITH LIMITED FIELD CHECKS)

N
W E
S

Kilometers
0 1 2 3 4 5

SCALE - 1 : 50,000

MAP SHEET NO. 73 I/2 **PURULIYA DISTRICT, WEST BENGAL**

J H A R K H A N D

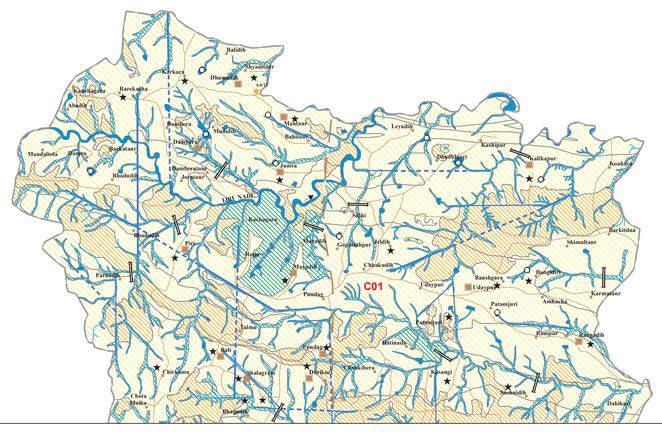

L E G E N D

MAP UNIT (HYDROGEOMORPHIC UNIT) REPRESENTED IN THE MAP WITH ALPHANUMERIC CODE (COLOUR INDICATES YIELD RANGE AND HATCHING INDICATE DEPTH RANGE)	GEOLOGICAL SEQUENCE / ROCK TYPE (REPRESENTED IN THE MAP WITH NUMERIC CODE)		GEOMORPHIC UNIT / LANDFORM (REPRESENTED IN THE MAP WITH ALPHABETIC CODE)	DEPTH TO WATER LEVEL PRE / POST- MONSOON (AVERAGE IN METERS) / NO. OF WELLS OBSERVED	RECHARGE CONDITIONS BASED ON AVAILABILITY OF WATER (RAINFALL & OTHER SOURCES)	GROUND WATER PROSPECTS: AQUIFER MATERIAL	TYPE OF WELLS SUITABLE	DEPTH RANGE OF WELLS (SUGGESTED) MIN - MAX (IN METERS)	YIELD RANGE OF WELLS (EXPECTED) (in LPM or m^3 / day)	HOMOGENEITY IN THE UNIT & SUCCESS RATE OF WELLS (PROBABILITY)	QUALITY OF WATER POTABLE (P) NON - POTABLE (NP) (INDICATE REASONS IF NON POTABLE)	GROUND WATER IRRIGATED AREA (APPROX . RANGE IN PERCENTAGE)	RECHARGE STRUCTURES SUITABLE & PRIORITY	REMARKS (PROBLEMS / LIMITATIONS)
						LS = LOOSE SEDIMENTS FR = FRACTURED ROCK FRR = FISSURED ROCK FR = FRACTURED ROCK WR = WEATHERED ROCK / WM = WEATHERED MATERIAL IR = IMPERVIOUS ROCK IM = IMPERVIOUS MATERIAL	DW = DUG WELL BW = BORE WELL TW = TUBE WELL DBW / = DUG CUM-BORE WELL / DTW = DUG CUM-TUBE WELL		HIGH MODERATE LOW		PT = PERCOLATION TANK CD = CHECK DAM NB = NALA BUND RW = RECHARGE WELL DT = DESILTING OF TANK RP = RECHARGE PIT SD = SUBSURFACE DYKE RS = RECHARGE SHAFT ST = STORAGE TANK SCM = SOIL CONSERVATION MEASURES	
VFS832	Chhotanagpur Gneissic Complex (Lower Proterozoic-2300 - 2400 mill yrs.)	Granitoid Gneiss (832)	Valley Fill Shallow (VFS)	No wells observed	Moderate	LS Underlain by WM+FR	TW / BW	30 - 50	150 - 175 LPM	Moderate	P	Negligible	CD Moderate	Prospects inferred as no wells observed. Recharge condition is moderate with moderate groundwater prospects
BPM832			Buried Pediplain Moderate (BPM)	No wells observed	Moderate	WM+FR	DW TW / BW	5 - 10 40 - 50	15 - 25 m^3/day 150 - 175 LPM	Moderate	P	Nil	RP Moderate	Recharge structure will improve ground water prospects
BPS832			Buried Pediplain Shallow (BPS)	6.68 / HP - 1	Limited	WM+FR	DW TW / BW	5 - 10 40 - 60	10 - 15 m^3/day 75 - 100 LPM	Low	P	5%	RP High	Recharge structures will improve sustainability of groundwater sources
PPS832			Weathered Pediplain Shallow (PPS)	No wells observed	Poor	FR	DW TW / BW	5 - 10 40 - 60	5 - 10 m^3/day 30 - 50 LPM	Low	P	Nil	RP High	Due to high run off and poor infiltration, recharge structures are required to maintain sustainability of ground water sources
VFS923	Unclassified Metamorphics (Older Metamorphics) (Archaean)	Mica Schist (923)	Valley Fill Shallow (VFS)	No wells observed	Moderate	LS Underlain by WM+FR	TW / BW	30 - 50	100 - 125 LPM	Moderate	P	Nil	CD Moderate	Prospects inferred as no well observed. Recharge condition is moderate with moderate groundwater prospects
BPM923			Buried Pediplain Moderate (BPM)	No wells observed	Moderate	WM+FR	DW TW / BW	5 - 10 40 - 50	10 - 15 m^3/day 100 - 125 LPM	Moderate	P	Nil	RP Moderate	Weathered material and underlying fractured rock form the aquifer. Recharge structures will improve sustainability of groundwater resources
BPS923			Buried Pediplain Shallow (BPS)	No wells observed	Limited	WM+FR	DW TW / BW	5 -10 40 - 60	5 - 10 m^3/day 50 - 75 LPM	Low	P	8%	RP High	Recharge structures will improve sustainability of groundwater sources
PPS923			Weathered Pediplain Shallow (PPS)	No wells observed	Poor	FR	DW TW / BW	5 - 10 40 - 60	5 - 10 m^3/day 30 - 50 LPM	Low	P	Nil	RP High	Due to high run-off and poor infiltration, recharge structures are required to maintain sustainability of ground water sources

F_____F/ _____ / — — -

These are fault / fracture zones, which generally act as conduits for movement of ground water in hard rocks. Along these zones, the yields are significantly higher and wells are likely to be sustainable for longer duration. However, the inferred fractures need to be confirmed by detailed ground surveys.

D____D /Q____Q / P___P
D— — -D / Q— — -Q / P__ __ ,P

These are dykes, quartz reefs and pegmatite veins, which generally act as barriers for ground water movement.

N.B.-The depth range and yield range of wells may vary within the unit because of certain inhomogeneities. Fractures/Lineaments which are clearly observed / inferred from the satellite image are indicated on the map. There could be some obscured fractures which also influence the ground water prospects. Locations of the recharge structures shown in the map are tentative. This map is useful for narrowing down the target zones,and exact location on the ground for wells and recharge structures should be identified based on follow-up ground hydrogeological/geophysical surveys.

GROUND WATER PROSPECTS INFORMATION

YIELD RANGE OF WELLS	COLOUR CODE	DEPTH RANGE OF WELLS: SHALLOW < 20 METERS	MODERATE 20 - 50 METERS	DEEP > 50 METERS
> 800 LPM	VIOLET			
400 - 800 LPM	INDIGO			
200 - 400 LPM	BLUE			
100 - 200 LPM	GREEN			
50 - 100 LPM	YELLOW			
30 - 50 LPM	ORANGE			
20 - 30 LPM	BROWN			
10 - 20 LPM	PINK			
Prospects inferred as valley portions only (Hills, Plateus etc.)	RED			
Run-off zone/ Barrier for G.W. movement		(Inselberg / Ridge / Dyke etc.)		

HYDROLOGICAL INFORMATION

DESCRIPTION	SYMBOL
CANAL / TANK IRRIGATED AREA	
GROUND WATER IRRIGATED AREA	
RIVER / STREAM (with sand)	
WATER BODY / SPRING	
CANAL	
RAIN GUAGE STATION (With average annual rainfall in mm)	800

RECHARGE STRUCTURES SUGGESTED

PERCOLATION TANK		CHECK DAM	
NALA BUND		RECHARGE WELL	
DESILTING OF TANK		RECHARGE PIT	
SUBSURFACE DYKE		RECHARGE SHAFT	
SOIL CONSERVATION MEASURES		STORAGE TANK	

WELLS OBSERVED DURING FIELD VISIT

YIELD RANGE IN LPM	BORE / TUBE WELL	YIELD RANGE IN m^3/ day	DUG WELL / RING WELL
> 800 LPM	10/70	> 400 m^3 / day	8/15
400 - 800 LPM	10/70	200 - 400 m^3 / day	8/15
200 - 400 LPM	10/70	100 - 200 m^3 / day	8/15
100 - 200 LPM	10/70	50 - 100 m^3 / day	8/15
50 - 100 LPM	10/70	25 - 50 m^3 / day	8/15
30 - 50 LPM	10/70	15 - 25 m^3 / day	8/15
20 - 30 LPM	10/70	10 - 15 m^3 / day	8/15
10 - 20 LPM	10/70	5 - 10 m^3 / day	8/15
< 10 LPM	10/70	< 5 m^3 / day	8/15

Colour inside well symbol indicates yield range. The figures on the top right hand side of well indicate the depth to water level and depth of well in meters

DUG - CUM- BORE WELL — HAND PUMP WELL
ARTESIAN WELL — OBSERVATION WELL OF G.W DEPT. / C.G.W.B.

STRUCTURAL INFORMATION

DIPS	BEDDING	SCHISTOSITY/ FOLIATION
GENTLE (< 15)		
MODERATE (15 - 45)		
STEEP (45 - 80)		
SUB - VERTICAL TO VERTICAL (> 80)		

ANTICLINE / ANTIFORM
SYNCLINE / SYNFORM
TREND LINE
ESCARPMENT
LITHOLOGY / GEOMORPHIC UNIT BOUNDARY

	MINOR	MAJOR
FAULT	F F	F F
THRUST	T T	T T
FRACTURE / LINEAMENT		
FRACTURE / LINEAMENT (Inferred)		
SHEAR ZONE (Confirmed / Inferred)	S S /S	S S
DYKE (Confirmed / Inferred)	D / D	D / D
QUARTZ REEF (Confirmed / Inferred)	Q / Q	Q / Q
PEGMATITIE VEIN (Confirmed / Inferred)	P / P	P / P

Lithologic contacts are inferred at places & Geomorphic boundaries are gradational

BASE MAP INFORMATION

SYMBOL	DESCRIPTION
NH - 2	NATIONAL HIGHWAY
SH - 9	STATE HIGHWAY
	METALLED ROAD
	OTHER ROAD
	RAILWAY
	CITY / VILLAGE
	HABITATIONS : NON - COVERED (NC) PARTIALLY COVERED (PC)

BOUNDARY :
STATE
DISTRICT
BLOCK

OTHER INFORMATION

Rainfall : 1322 mm

(Source IMD)

LOCATION INFORMATION

STATE INDEX

DISTRICT INDEX

A -BIRBHUM
B-BARDDHAMAN
C-PURULIA
D-BANKURA
E-PASCHIM MEDINIPUR

BLOCK INDEX

C01 - JAPUR

MAPSHEET INDEX

72E/13	72E/1	72E/5
72E/14	72E/2	72E/6
72E/15	72E/3	72E/7

PREPARED BY
GEOINFORMATICS & REMOTE SENSING CELL
W.B. STATE COUNCIL OF SCIENCE AND TECHNOLOGY
DEPARTMENT OF SCIENCE AND TECHNOLOGY
GOVERNMENT OF WEST BENGAL
4TH FLOOR, BIKASH BHAVAN
SALT LAKE, KOLKATA 700 091

TECHNICAL GUIDANCE & QUALITY CHECK
NATIONAL REMOTE SENSING CENTRE
INDIAN SPACE RESEARCH ORGANISATION (ISRO)
DEPT. OF SPACE, GOVT. OF INDIA
BALANAGAR, HYDERABAD - 500 625

PARTICIPATING ORGANIZATIONS
SURVEY OF INDIA
GEOLOGICAL SURVEY OF INDIA
PHED, GOVT. OF WEST BENGAL
STATE WATER INVESTIGATION DIRECTORATE, GOWB
P.S.MAPS (LAND RECORD), GOVT OF WEST BENGAL

METHODOLOGY & PROJECT EXECUTION
NATIONAL REMOTE SENSING CENTRE
INDIAN SPACE RESEARCH ORGANISATION (ISRO)
DEPT. OF SPACE, GOVT. OF INDIA
BALANAGAR, HYDERABAD - 500 625

SPONSORED BY
RAJIV GANDHI NATIONAL DRINKING WATER MISSION
(PHASE III B)
DEPARTMENT OF DRINKING WATER SUPPLY (DDWS)
MINISTRY OF RURAL DEVELOPMENT
GOVERNMENT OF INDIA
NEW DELHI

© NRSC (ISRO), DEPT. OF SPACE, GOVT. OF INDIA

DATA USED : IRS - P6 LISS III FCC dated February 2006, GROUND TRUTH & WELL OBSERVATION during April-May, 2009 & Jan-Feb, 2010, Published Geological maps & Literatures.

Designed & Developed by Hydrogeology Division, NRSC, ISRO