
## GROUND WATER PROSPECTS MAP

(PREPARED FROM SATELLITE IMAGE INTERPRETATION WITH LIMITED FIELD CHECKS)

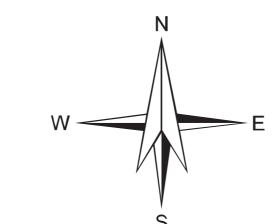

Designed & Developed by Hydrogeology Division, NRSC, ISRO


SCALE - 1: 50,000 MAP SHEET NO. 731/6 **PURULIYA DISTRICT, WEST BENGAL** 

DATA USED: IRS - P6 LISS III FCC dated February 2006, GROUND TRUTH & WELL OBSERVATION during April-May, 2009 & Jan-Feb, 2010, Published Geological maps & Literatures.

NRSC (ISRO), DEPT. OF SPACE, GOVT. OF INDIA

## LEGEND

MAP UNIT	GEOLOGICAL SEQUENCE		GEOMORPHIC UNIT / LANDFORM	DEPTH TO WATER LEVEL	RECHARGE CONDITIONS	GROUND WATER PROSPECTS							RECHARGE STRUCTURES	REMARKS
( HYDROGEOMORPHIC UNIT )  REPRESENTED IN THE MAP WITH ALPHANUMERIC CODE  ( COLOUR INDICATES YIELD RANGE AND HATCHING INDICATE DEPTH RANGE)		(REPRESENTED IN THE MAP WITH NUMERIC CODE)	( REPRESENTED IN THE MAP WITH ALPHABETIC CODE )	PRE / POST- MONSOON (AVERAGE IN METERS)  NO. OF WELLS OBSERVED	BASED ON AVAILABILITY OF WATER  ( RAINFALL & OTHER SOURCES )	AQUIFER MATERIAL  LS = LOOSE SEDIMENTS PR = PERMEABLE ROCK FIR = FISSURED ROCK FR = FRACTURED ROCK WM /= WEATHERED MATERIAL IR = IMPERIVIOUS ROCK IM = IMPERIVIOUS MATERIAL	TYPE OF WELLS SUITABLE  DW = DUG WELL RW = RING WELL BW = BORE WELL TW = TUBE WELL DBW /= DUG CUM-BORE WELL / DTW DUG CUM-TUBE WELL	DEPTH RANGE OF WELLS (SUGGESTED) MIN - MAX (IN METERS)	YIELD RANGE OF WELLS (EXPECTED) (in LPM or m³/day)	HOMOGENEITY IN THE UNIT & SUCCESS RATE OF WELLS (PROBABILITY)  VERY HIGH HIGH MODERATE LOW	QUALITY OF WATER  POTABLE (P) NON - POTABLE (NP)  (INDICATE REASONS IF NON POTABLE)	GROUND WATER IRRIGATED AREA (APPROX . RANGE IN PERCENTAGE)	SUITABLE & PRIORITY  PT = PERCOLATION TANK CD = CHECK DAM NB = NALA BUND RW = RECHARGE WELL DT = DESILTING OF TANK RP = RECHARGE PIT SD = SUBSURFACE DYKE RS = RECHARGE SHAFT ST = STORAGE TANK SCM = SOIL CONSERVATION MEASURES	(PROBLEMS / LIMITATIONS)
VF\$832	Chhotanagpur Gneissic Complex (Lower Proterozoic-2300 - 2400 mill.yrs.)  By Proterozoic-2300 - 2400 mill.yrs.)  (CS8)  (CS8)  (Complex (Lower Proterozoic-2300 - 2400 mill.yrs.)	Valley Fill Shallow (VFS)	No wells observed	Moderate	LS Underlain by WM+FR	TW / BW	30 - 50	150 - 175 LPM	Moderate	Р	5%	CD/DT Moderate	Prospects inferred as no wells observ Recharge condition is moderate with moderate groundwater prospects	
BPM832		Buried Pediplain Moderate (BPM)	No wells observed	Moderate	WM+FR	DW TW / BW	5 - 10 40 - 50	15 - 25 m <sup>3</sup> /day 150 - 175 LPM	Moderate	Р	Negligible	RP/DT Moderate	Recharge structure will improve grou water prospects	
BPS832		Buried Pediplain Shallow (BPS)	4.95 - 6.01 DW - 2	Limited	WM+FR	DW TW/BW	5 -10 40 - 60	10 - 15 m <sup>3</sup> /day 75 - 100 LPM	Low	Р	Negligible	RP/DT High	Recharge structures will improve sustainability of groundwater sources	
PPS832		Weathered Pediplain Shallow (PPS)	No wells observed	Poor	FR	DW TW/BW	5 - 10 40 - 60	5 - 10 m <sup>3</sup> /day 30 - 50 LPM	Low	Р	Negligible	RP/DT High	Due to high run off and poor infiltration recharge structures are required to maintain sustainability of ground water sources	
VFS923	Unclassified Metamorphics (Older Metamorphics)  (Archaean)  (Archaean)  (Archaean)  (Box 80)  (B		Valley Fill Shallow (VFS)	No wells observed	Moderate	LS Underlain by WM+FR	TW / BW	30 - 50	100 - 125 LPM	Moderate	Р	Nil	CD/DT Moderate	Prospects inferred as no well observe Recharge condition is moderate with moderate groundwater prospects
BPM923		Mica Schiet	Buried Pediplain Moderate (BPM)	No wells observed	Moderate	WM+FR	DW TW / BW	5 - 10 40 - 50	10 - 15 m <sup>3</sup> /day 100 - 125 LPM	Moderate	Р	Nil	RP/DT Moderate	Weathered material and underlying fractured rock form the aquifer. Recharge structures will improve sustainability of groundwater resource
BPS923		Buried Pediplain Shallow (BPS)	No wells observed	Limited	WM+FR	DW TW / BW	5 -10 40 - 60	5 - 10 m³/day 50 - 75 LPM	Low	Р	Negligible	RP/DT High	Recharge structures will improve sustainability of groundwater sources	
PPS923			Weathered Pediplain Shallow (PPS)	No wells observed	Poor	FR	DW TW / BW	5 - 10 40 - 60	5 - 10 m³/day 30 - 50 LPM	Low	Р	Nil	RP/DT High	Due to high run-off and poor infiltration recharge structures are required to maintain sustainability of ground water sources

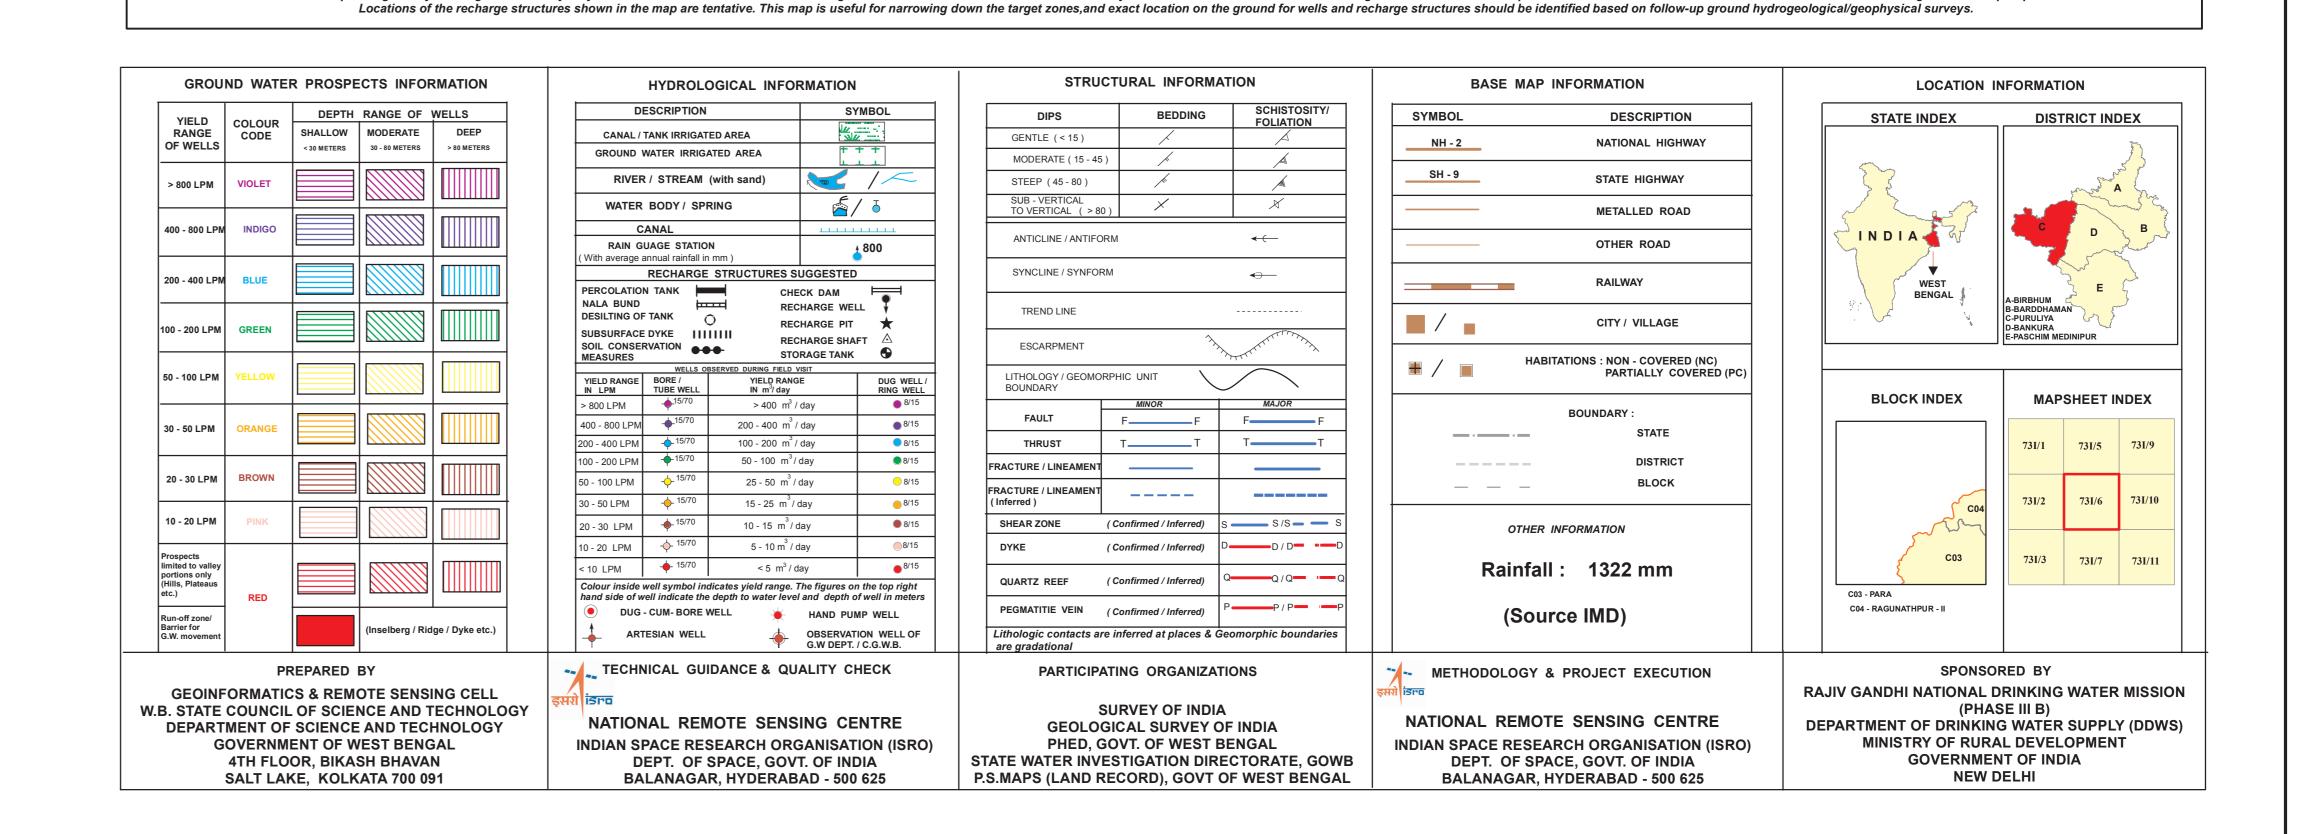

N.B.-The depth range and yield range of wells may vary within the unit because of certain inhomogeneities. Fractures/Lineaments which are clearly observed / inferred from the satellite image are indicated on the map. There could be some obscured fractures which also influence the ground water prospects.

These are dykes, quartz reefs and pegmatite veins, which generally act as barriers for ground water movement.